



All Kwik Goal products carry a **Lifetime Guarantee**. For help with guarantee issues visit [www.kwikgoal.com](http://www.kwikgoal.com) and click on the **Lifetime Guarantee** logo or contact customer service at 1-800-531-4252.

### **ASSEMBLY INSTRUCTIONS FOR 7C1 (BASEBALL FOUL POLE)**

1. Unpack all parts and check for damage that may have occurred during shipping. If damage has occurred, notify trucking company immediately. Lay out all parts. Remove packaging immediately. Wet or damp packaging may damage contents.
2. To assemble foul pole, join upright (A) to net attachment tube (B) with hardware supplied. See figure 1. **Be sure to coat all hardware with anti seize compound before fastening.**
3. Attach net to assembled foul pole upright with zip ties as shown in figure 2.
4. Dig holes a minimum of 49 1/2" deep and 24" in diameter at locations shown in FIG 3.
5. Prepare each hole as shown in FIG 4. Set ground sleeve (C) into hole, place assembled foul pole upright into ground sleeve (C) and lock alignment slot onto alignment pin as shown in FIG 4. **NOTE: TURN FOUL POLE SO NET IS ALIGNED WITH OUTFIELD FENCE.** See FIG 3.
6. Plumb and level foul pole and seal joint between ground sleeve (C) and assembled foul pole upright using tape (this will stop debris from entering the ground sleeve (C) during installation). Be sure that alignment slot located on the bottom foul pole is locked onto ground sleeve pin.
7. Pour concrete to top of ground sleeve (C) as shown in FIG 4.
8. Allow concrete to cure.
9. When removing foul pole upright from ground sleeve (C) be sure to install ground sleeve caps (D) to prevent debris from entering ground sleeve (C).
10. After reassembly, be sure to reseal the seam between the foul pole upright and ground sleeve (C) to prevent debris from entering ground sleeve (C).

**CAUTION: SPORTS EQUIPMENT MUST BE PROPERLY ANCHORED AND STORED AT ALL TIMES.**


**\*\*\*CAUTION\*\*\***

**This equipment has been designed to be used for the game of baseball only. Field equipment must be anchored AT ALL TIMES and shall be secured against tilting. Do not climb on the net or equipment framework at anytime! All fastenings must be checked to insure they are fully tightened before and after each use of this product. Equipment not in use must be disassembled and properly stored in a safe, secure area. Assembled field equipment should not be left unattended. Remove nets when equipment is not in use. Do not use this equipment during the threat of high winds. Field equipment must be checked for safety before and after each use. All warning and safety labels included with this product must be visible at all times. Any modifications to this or any Kwik Goal product will void any and all warranties.**

Parts List

- |                            |      |
|----------------------------|------|
| A) Upright                 | (2)  |
| B) Net Attachment Tube     | (2)  |
| C) Ground Sleeve           | (2)  |
| D) Ground Sleeve Cap       | (2)  |
| E) Net                     | (2)  |
| F) 5/16" x 5-1/2" Hex Bolt | (4)  |
| G) 5/16" Lock Washer       | (4)  |
| H) 5/16" Flat Washer       | (4)  |
| i) Small Zip Ties          | (30) |
| J) Large Zip Ties          | (18) |
| L) Anti-Seize Compound     | (1)  |

FIG. 1

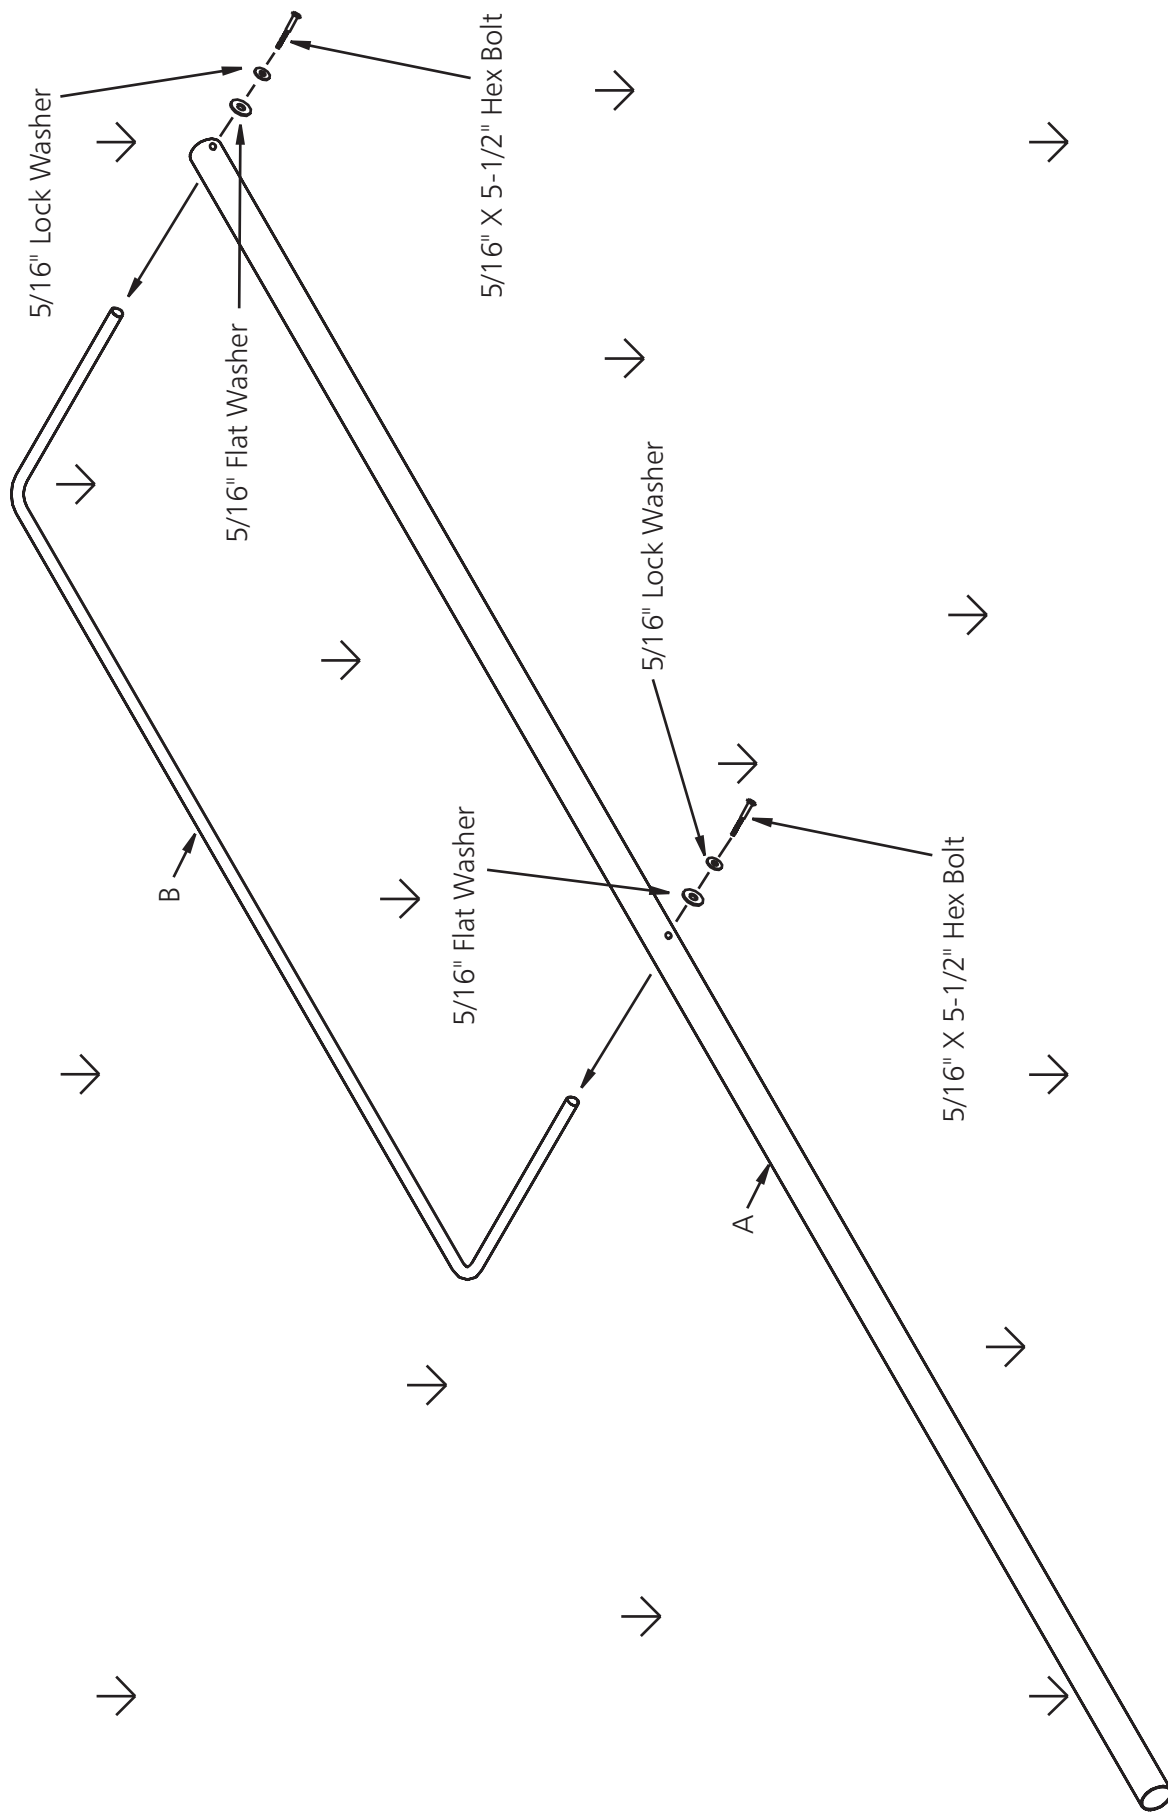

**FIG. 2**

